

2023 GNSS-IR Short Course – EarthScope Consortium

GNSS Interferometric Reflectometry: Basic Theory

Felipe Geremia-Nievinski (PhD)

Federal University of Rio Grande do Sul

felipe.nievinski@ufrgs.br

<https://orcid.org/0000-0002-3325-1987>




Summary

- 1) Context
- 2) Principles
- 3) Geometry
- 4) Physics
- 5) Fitting




Geremia-Nievinski (2022) "Low-Cost Ground-Based GNSS Reflectometry",
In: *Encyclopedia of Geodesy*, https://doi.org/10.1007/978-3-319-02370-0_175-1
Also available from: <https://www.researchgate.net/publication/365173903>

GNSS orbital constellations

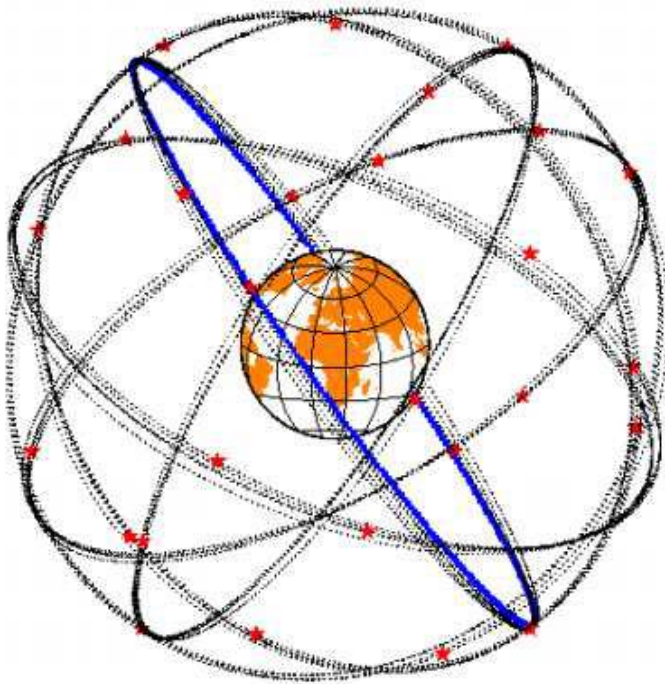

Inclination ~ 55 deg.

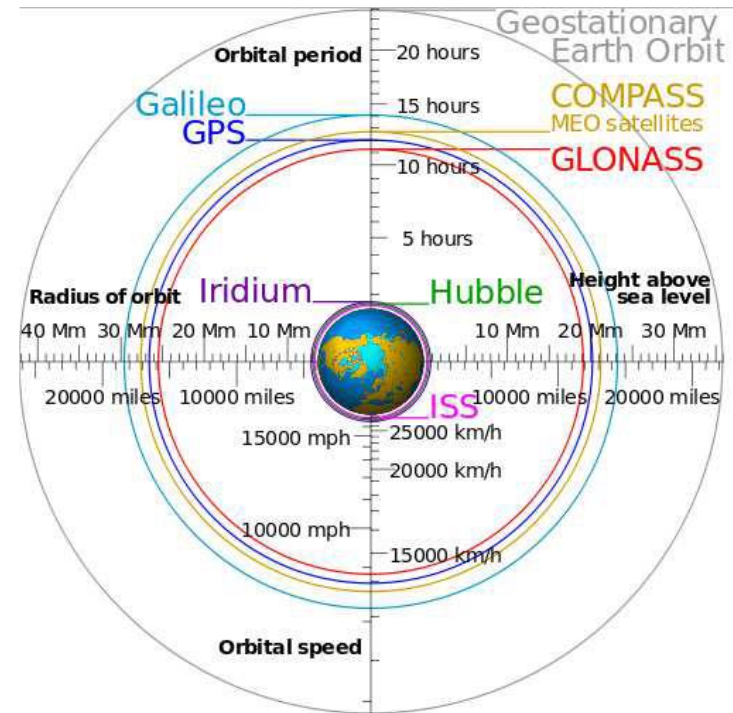


Altitude ~ 20,000 km


System	2002	2008	2020
GPS	24 satellites	31 satellites	~31 satellites
Galileo		2 satellites	~27 satellites
Compass		1 satellite	~35 satellites
GLONASS	8 satellites	16 satellites	~24 satellites
Total	32 satellites	50 satellites	~120 satellites

GNSS satellite sky tracks



polar

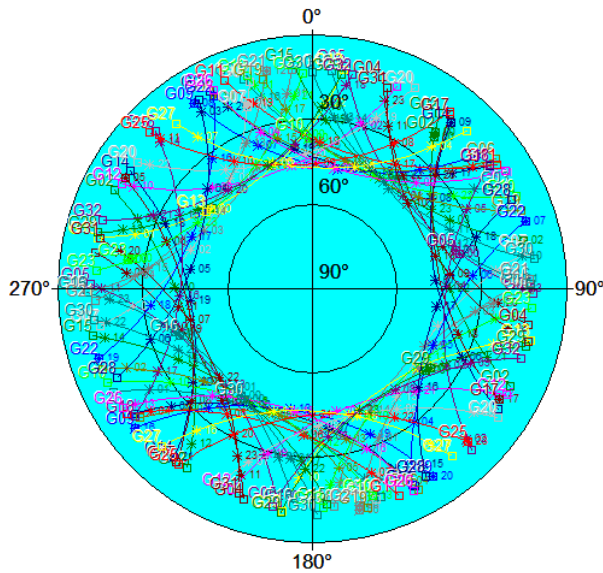

mid-latitude

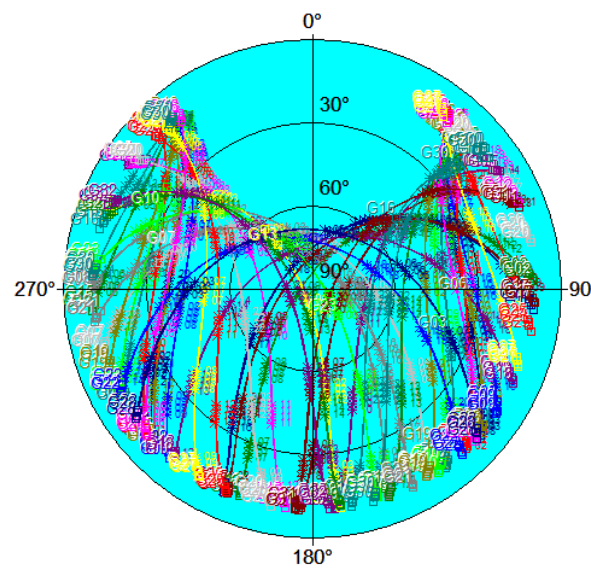

equatorial

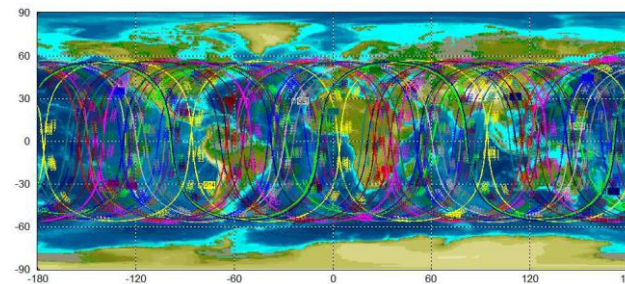
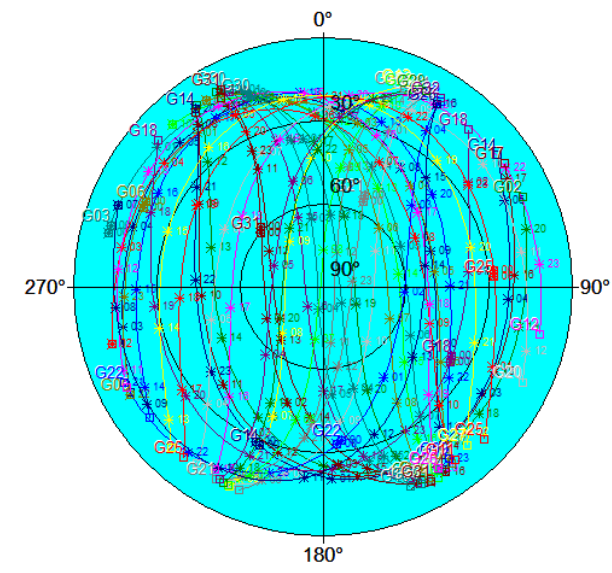


elevation angle (0-90 deg)
azimuth (0-360 deg.)


polar hole

rising/setting
satellites


GNSS radio waves

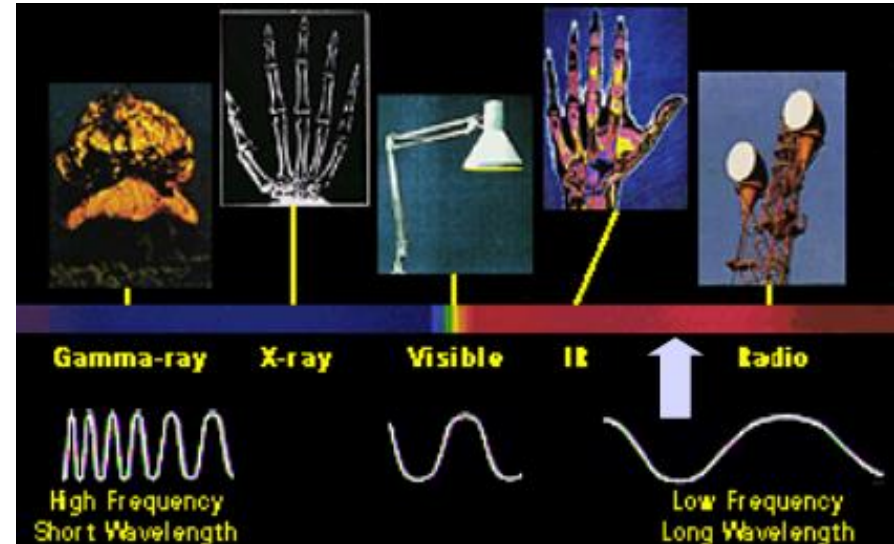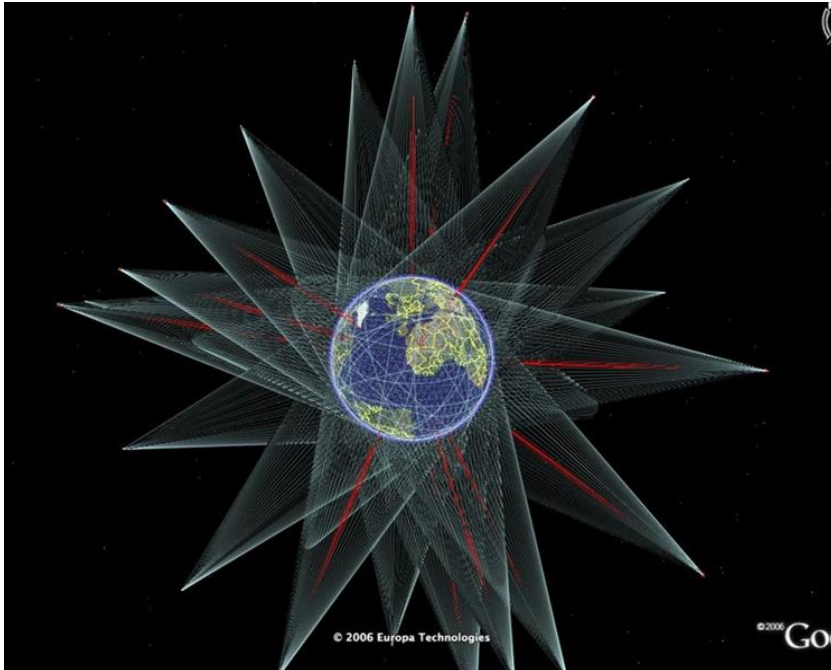


Multiple independent carriers
Carrier wavelength ~ 20 cm (L band)
Polarization: right-handed (RHCP)

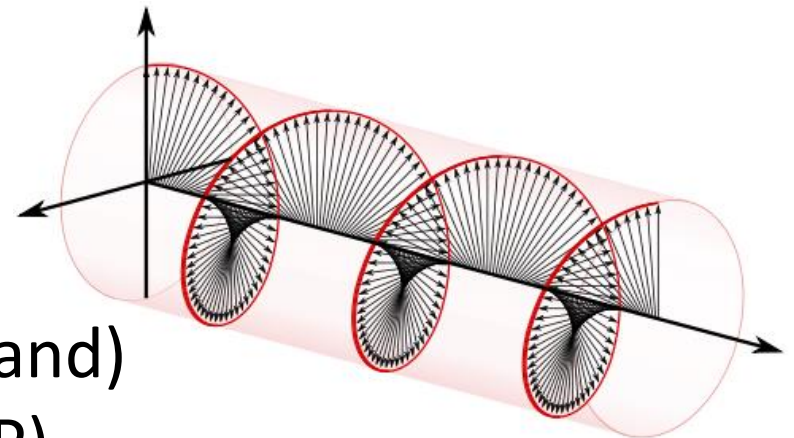

GNSS atmospheric remote sensing

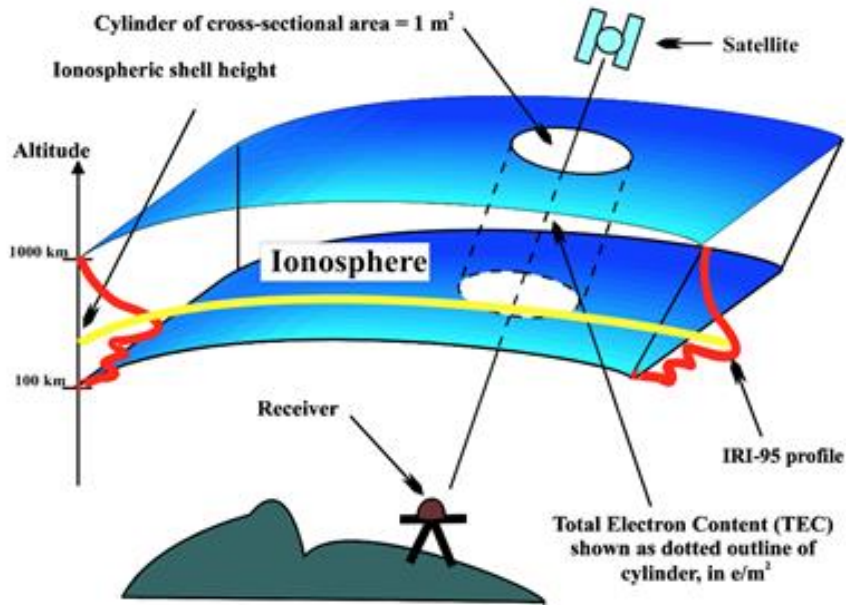


Ground-based
(integrated
GNSS met.)

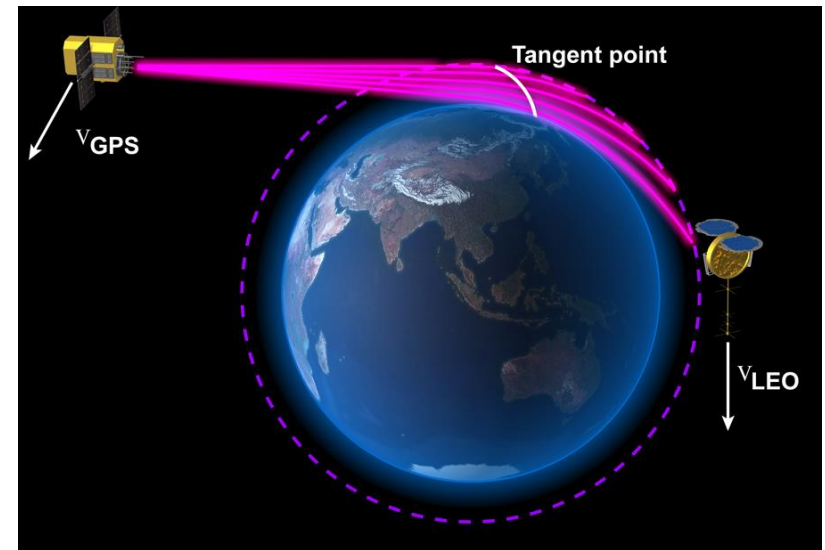


Space-based
(radio occultation
or limb sounding)

GNSS Reflectometry

Dual channel: up/down
(direct/reflection)

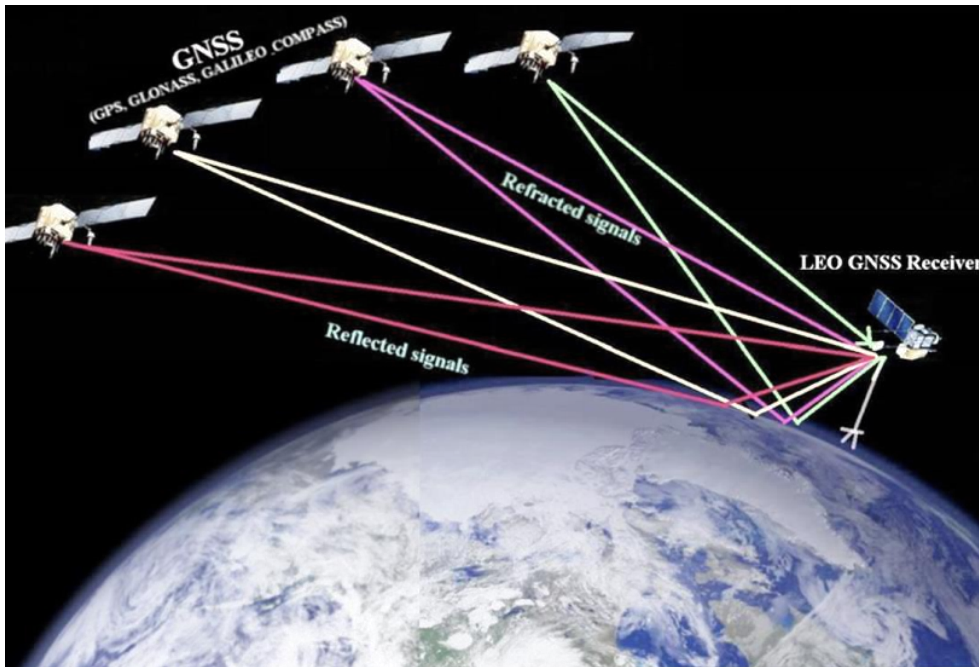


Space-borne

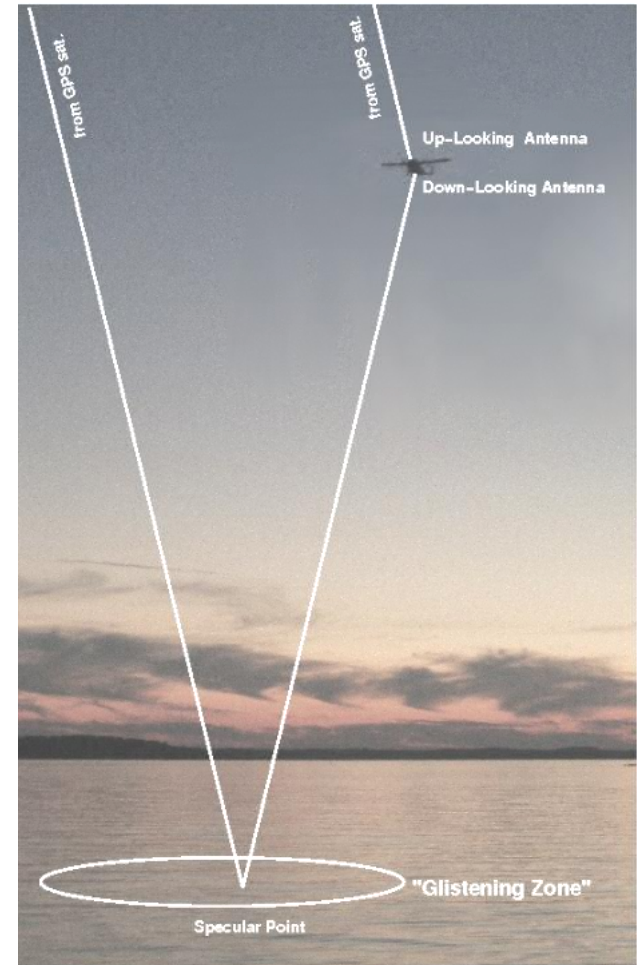

Airborne

GNSS Interferometric Reflectometry


Single channel: up+down
multipath=direct+reflection

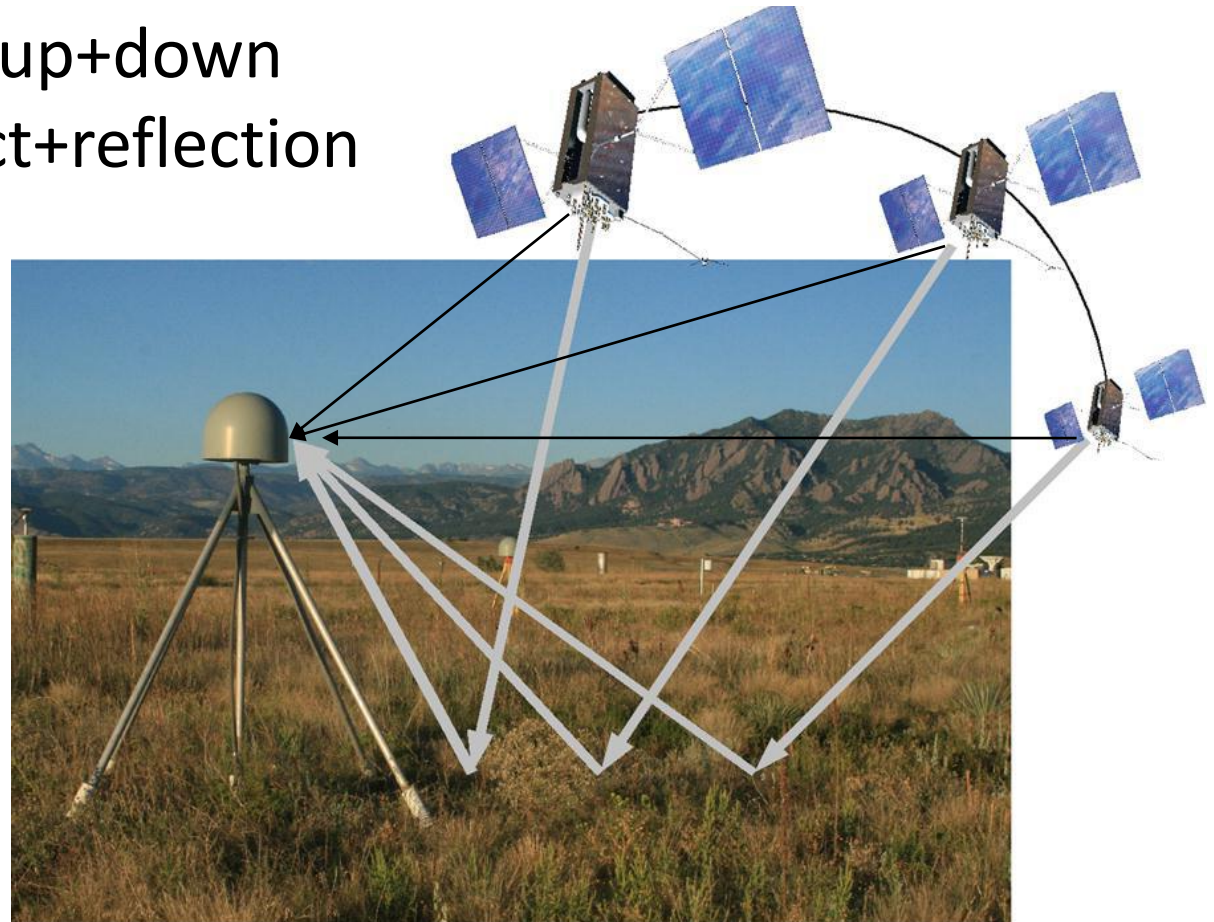


Ground-based

Related radar sensors

Radar altimetry
(monostatic, vertical)

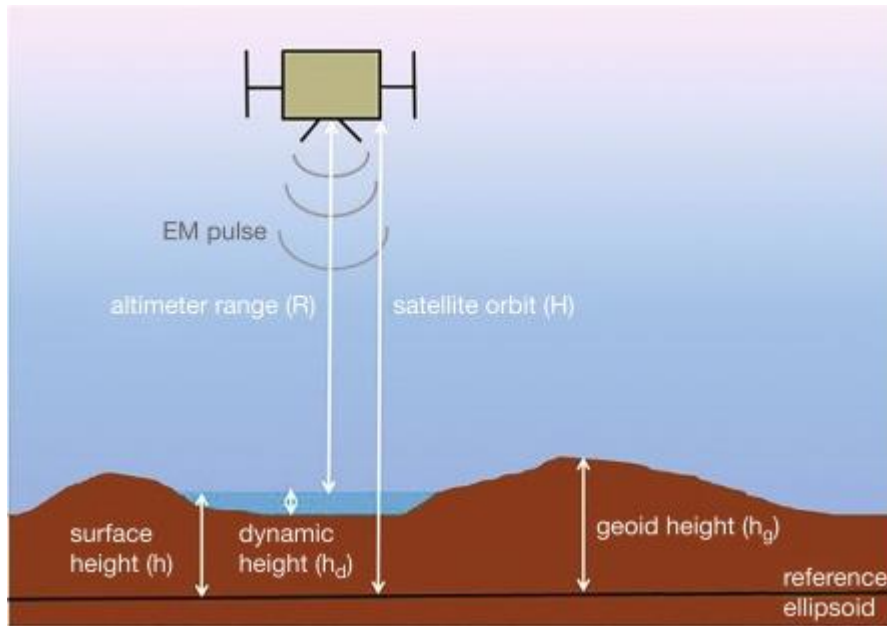

Radar interferometry
(bistatic, imaging)

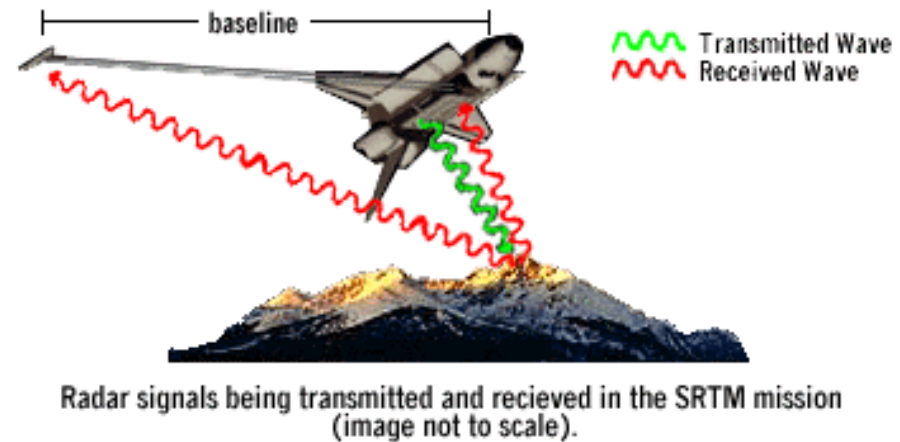




GNSS-R is a type of bistatic radar (non-imaging)

Signal-to-noise ratio (SNR)

- Interference pattern
 - Constructive/destructive
 - Superposition of direct and reflected radio waves

$$SNR \propto P_c = P_d + P_r + 2P_d^{0.5}P_r^{0.5} \cos \phi_i$$

$$= P_d(1 + P_i + 2P_i^{0.5} \cos \phi_i)$$

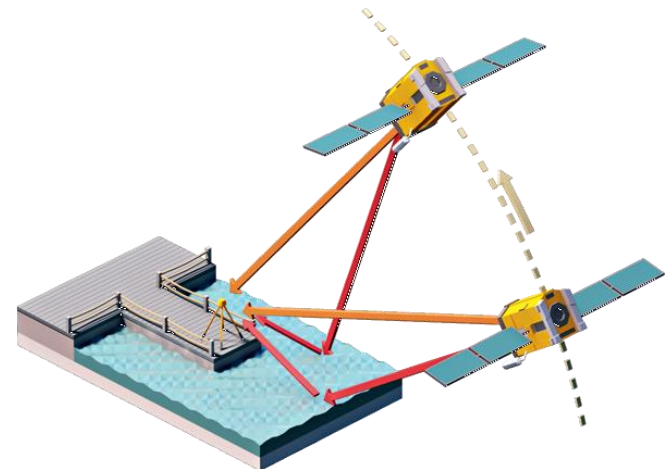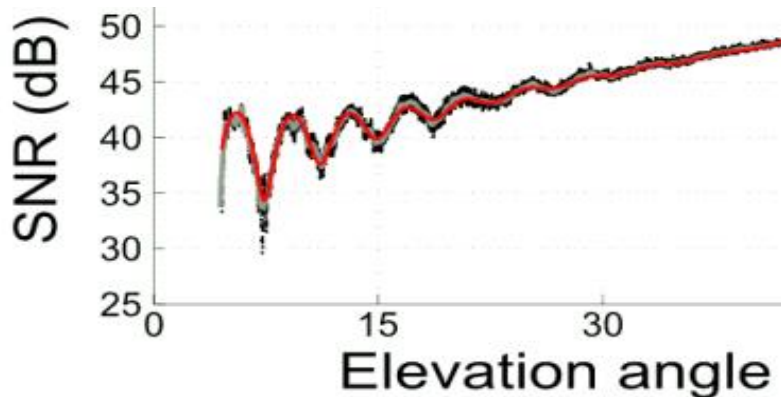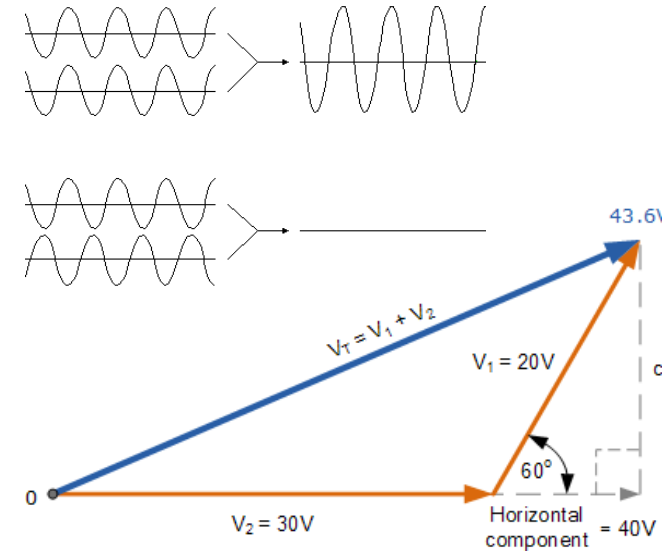

Interferometric delay and phase

- Reflection minus direct propagation distance

$$D_i = \tau = 2H \sin e$$

- Maximum: $2H$ @zenith
- Minimum: zero @horz.


- Non-geometric phase ϕ_X

- Surface + Antenna

- Total:

$$\phi_i = kD_i + \phi_X + \dots$$

$$k = 2\pi/\lambda$$

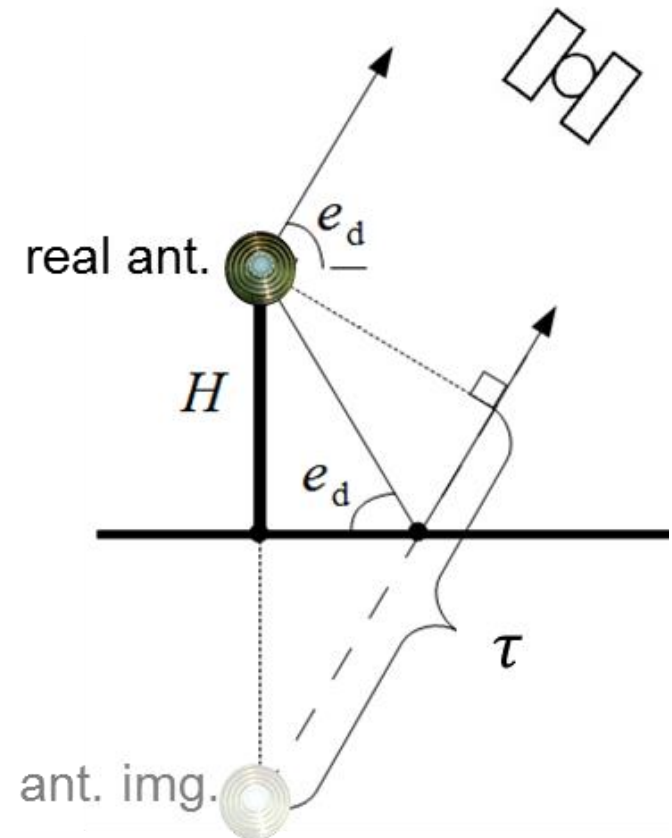


Interferometric power

- Reflection power over direct power


$$P_i = P_r / P_d$$

- Maximum 1 @horz.
- Minimum zero @zen.


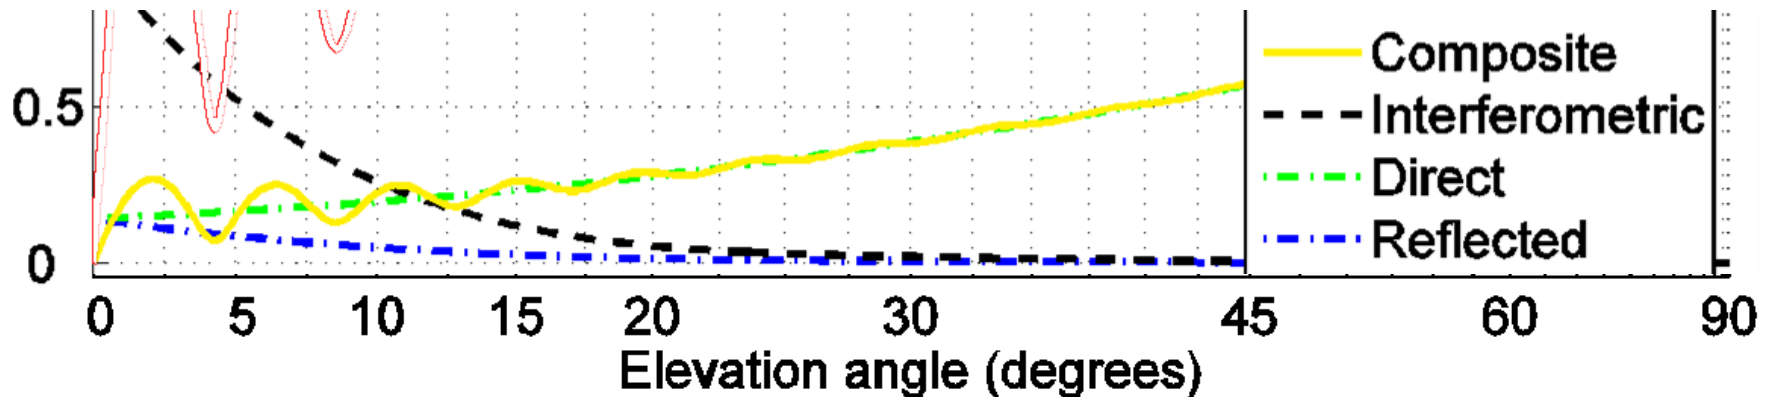


Driven by antenna gain & phase patterns.
Also by surface roughness & material.

Reflector height

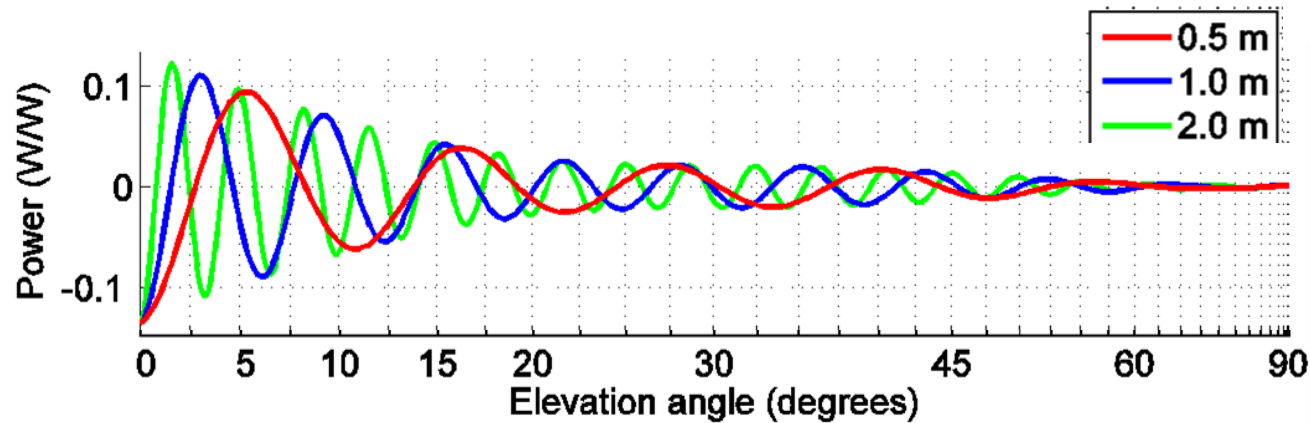


Random roughness

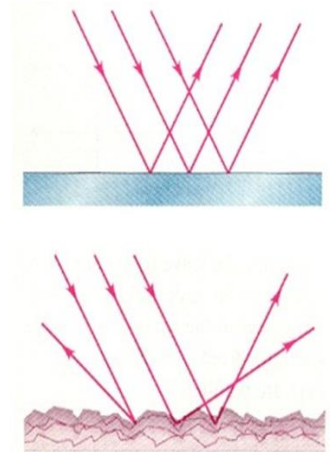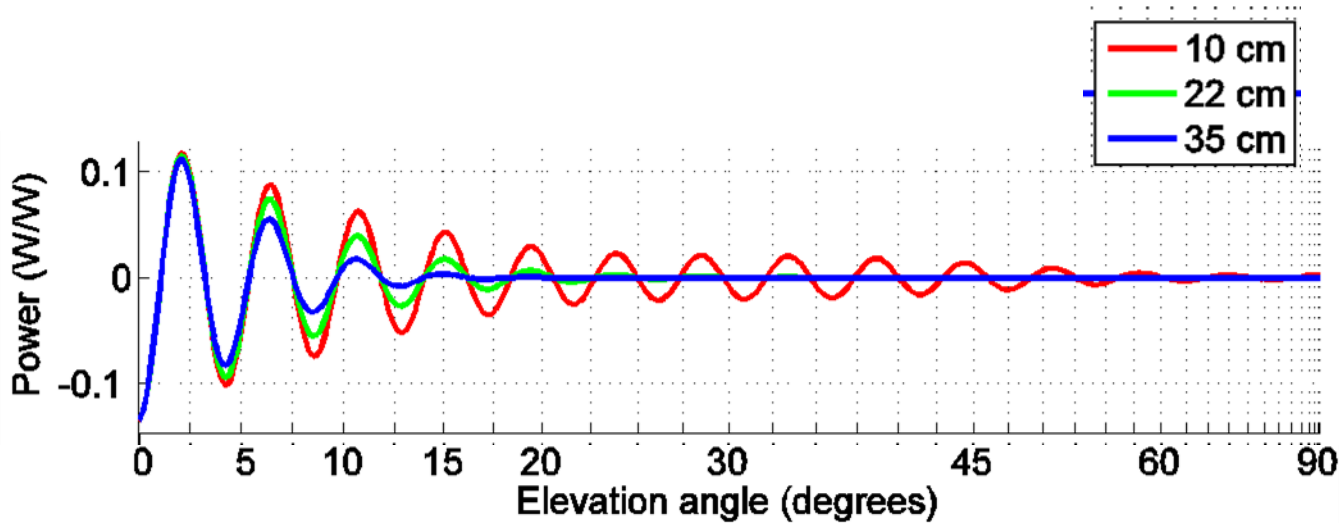


Loss of coherence due to height fluctuations

$$\sigma_{D_i} = 2\sigma_H \sin e$$

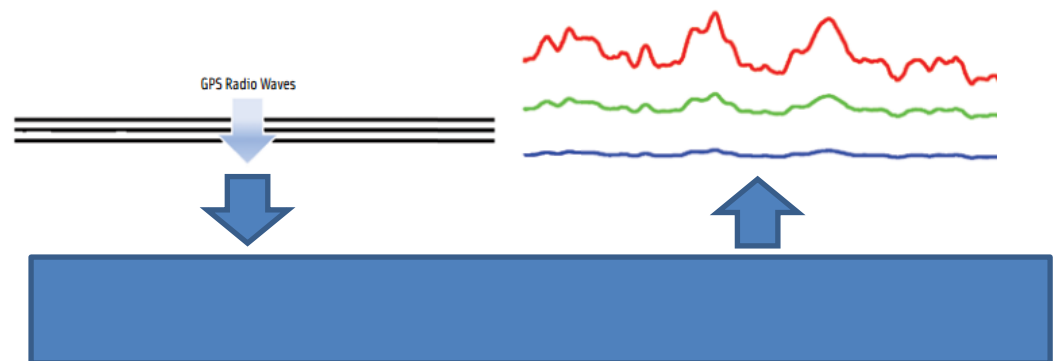


Surface material

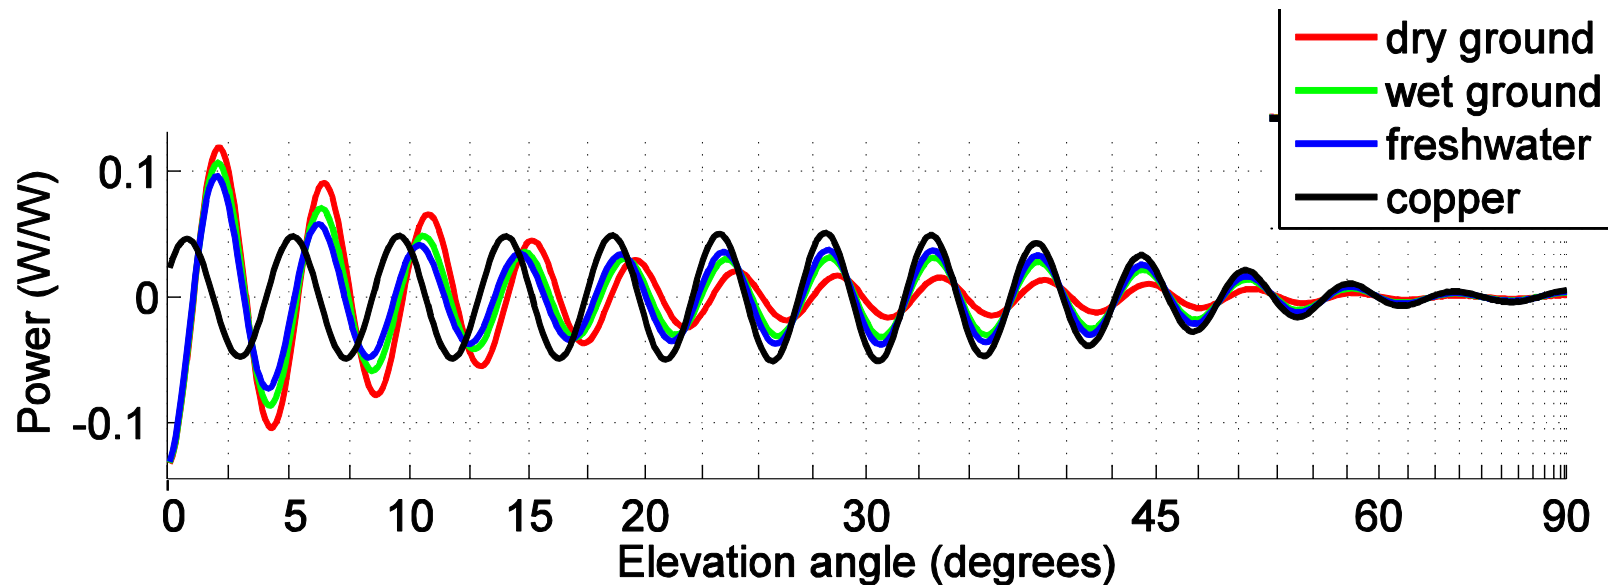

Function of complex permittivity (real and imaginary).
Affects both amplitude and phase.



Specular reflection points

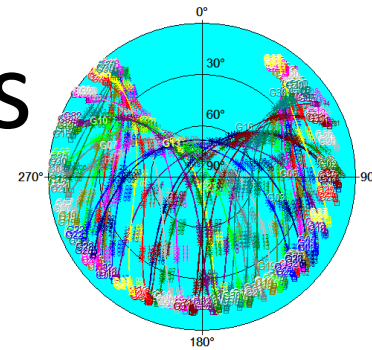

$$R = h/\tan(e)$$




Geometric Optics

- Thin “rays”
- Direct and reflection
- Snell’s law

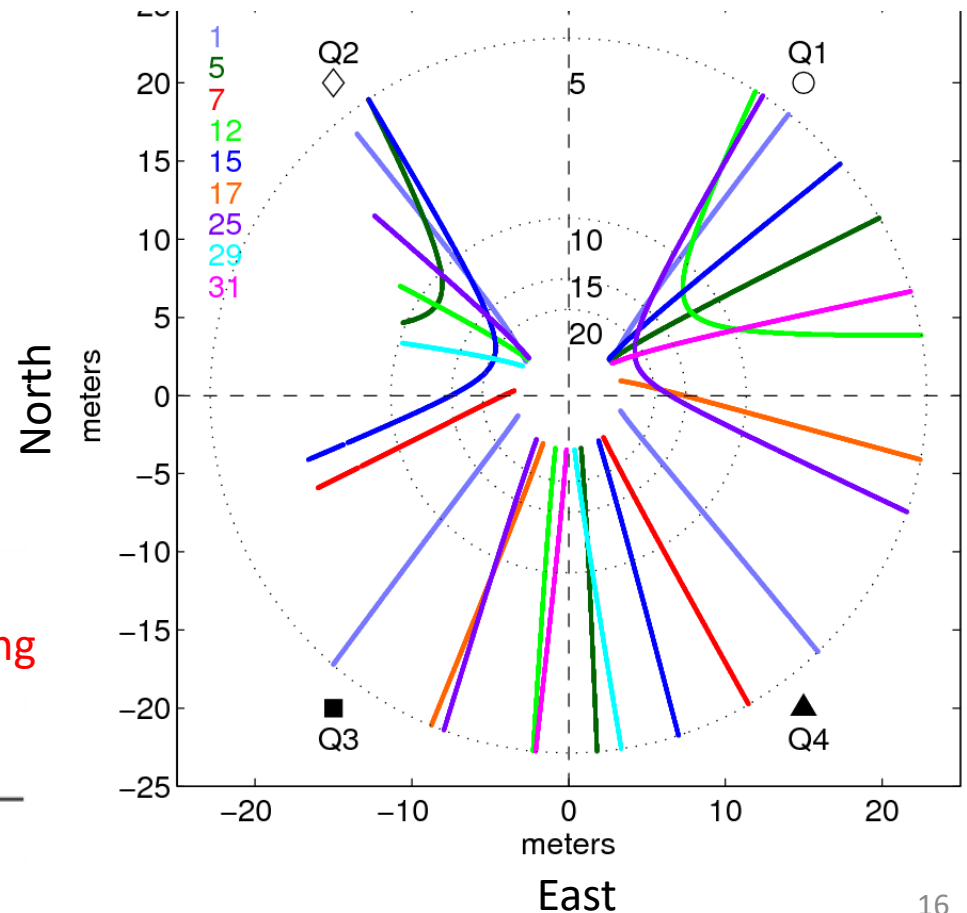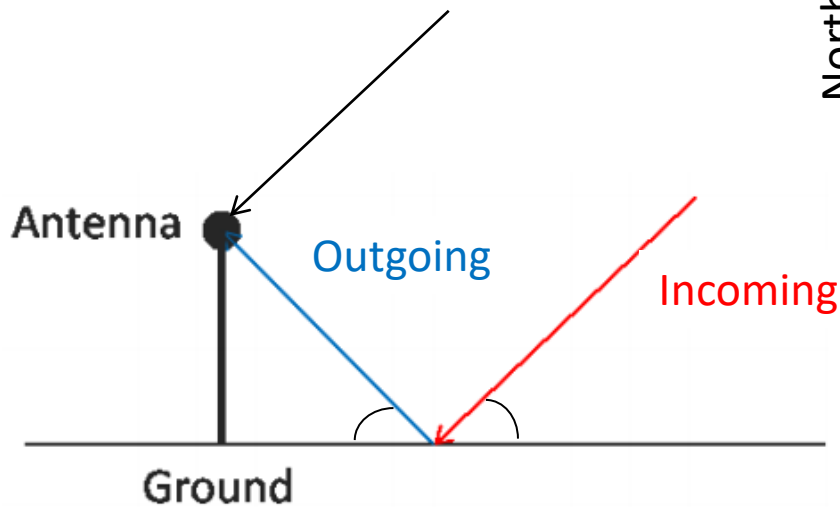


Fresnel zones

- Physical Optics
 - Ellipses
 - Ray “thickness”
 - Surface wavelets
 - Clearance requirements
 - Gradual tapering
 - (Otherwise, diffraction)

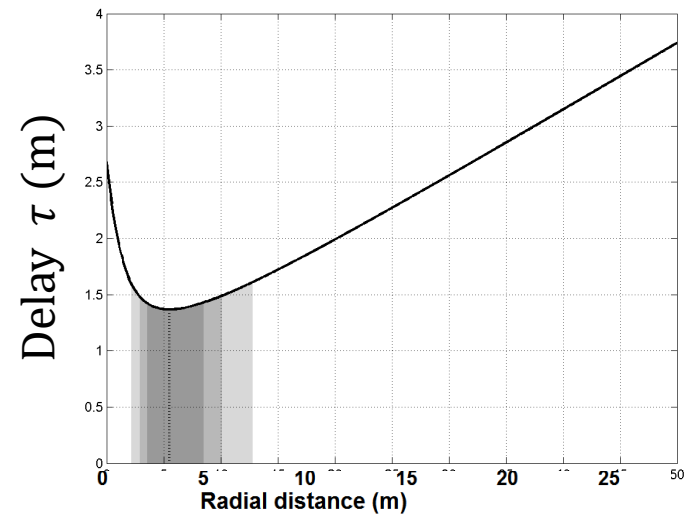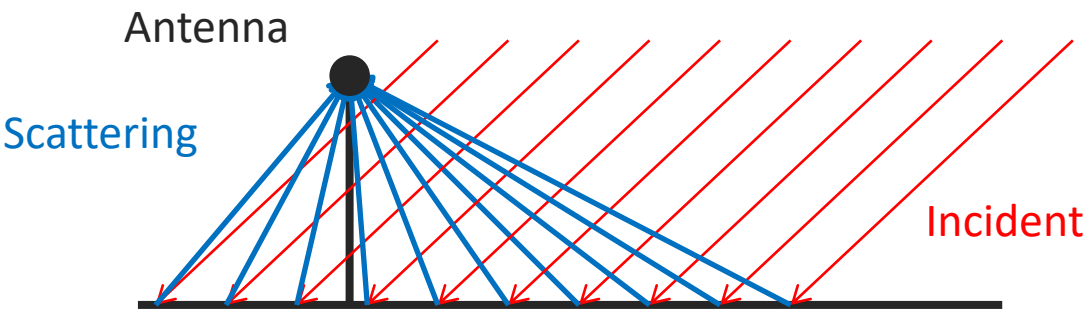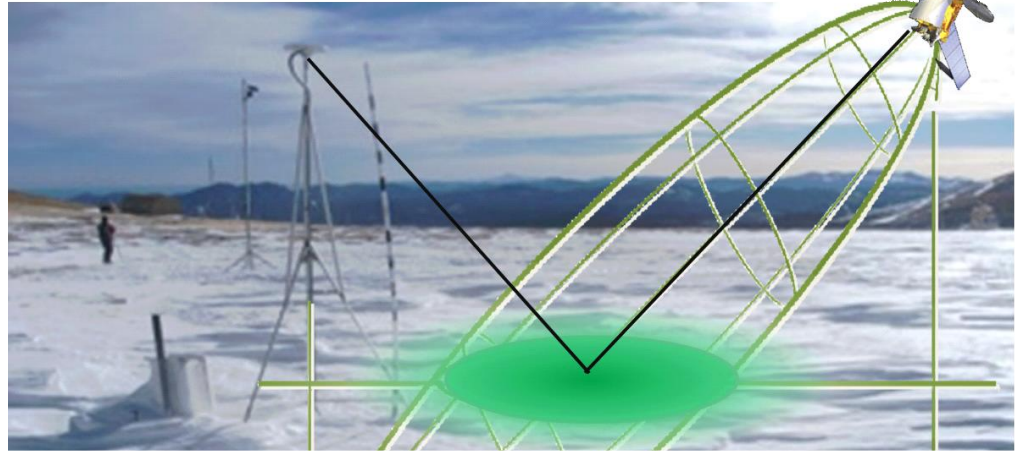

SNR data fitting

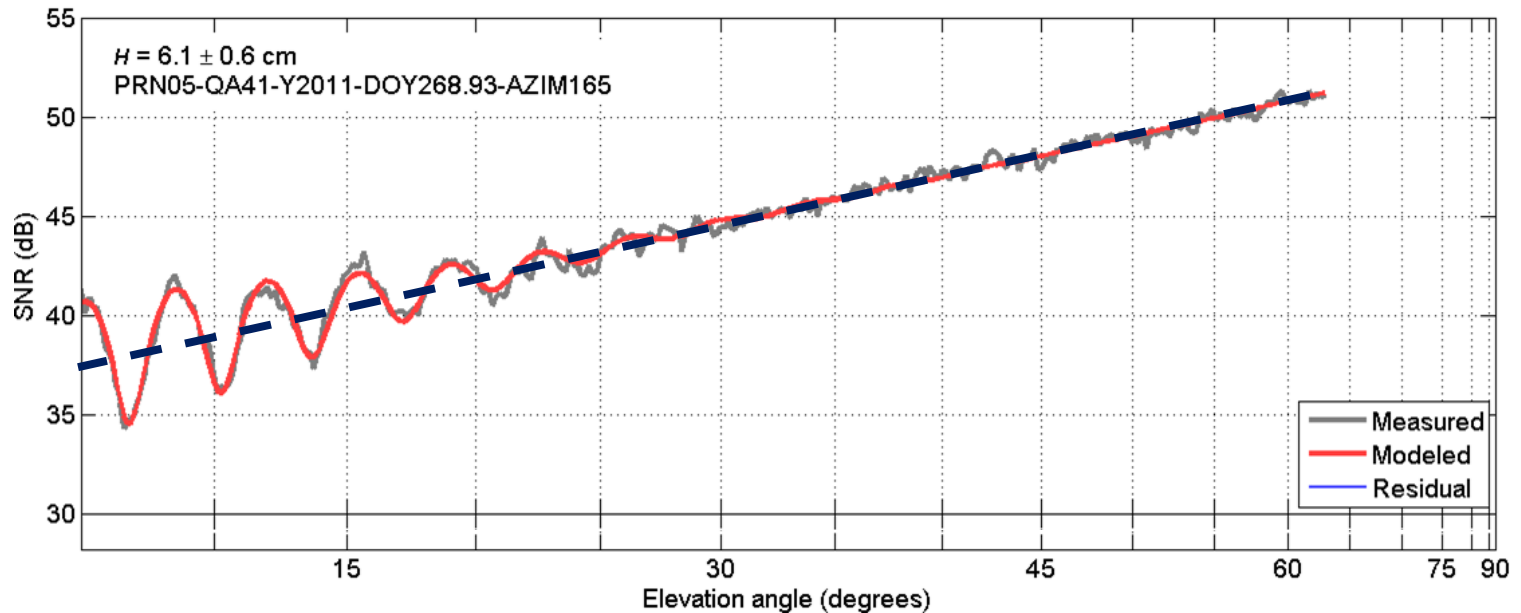

total =
trend +
oscillations:

$$S = \bar{S} + s$$

$$\bar{S} = c_0 + c_1 k_z + c_2 k_z^2 + \dots$$

$$s = A \cos(\hat{H} k_z + \varphi)$$





$$k_z = 4\pi\lambda^{-1} \sin e = 2k \sin e$$

altimetry
retrieval:

$$H = (\lambda/2) * N /$$


$$(\sin(e_2) - \sin(e_1))$$

Spectral analysis

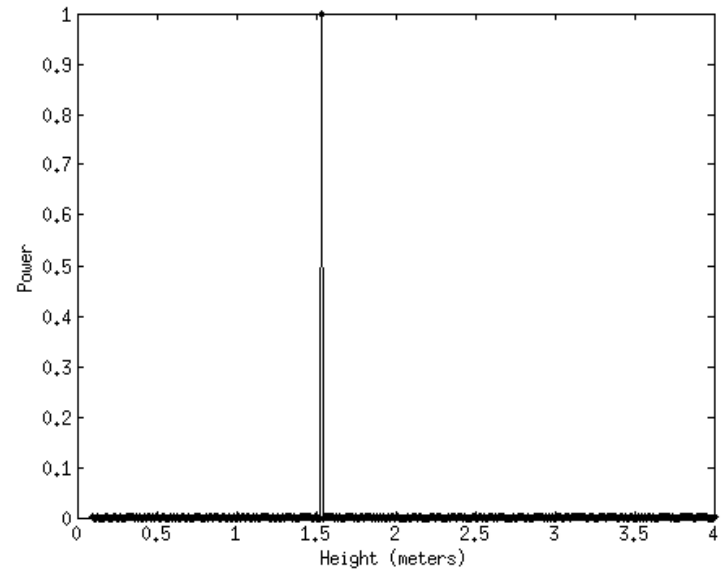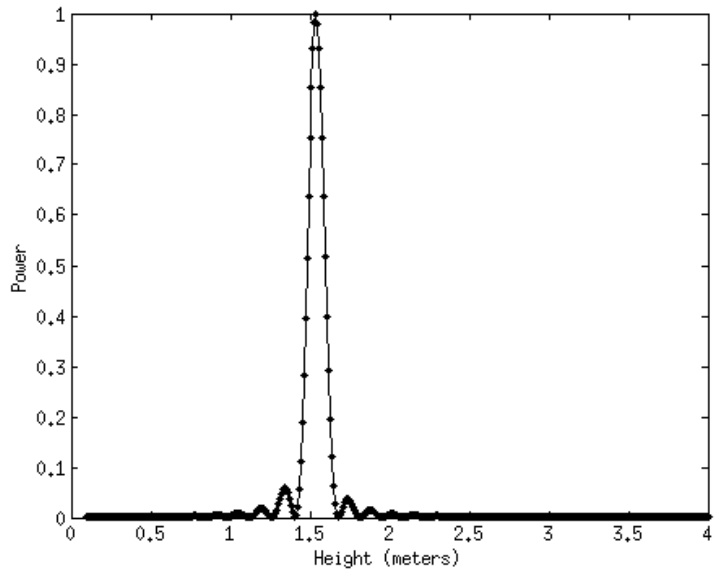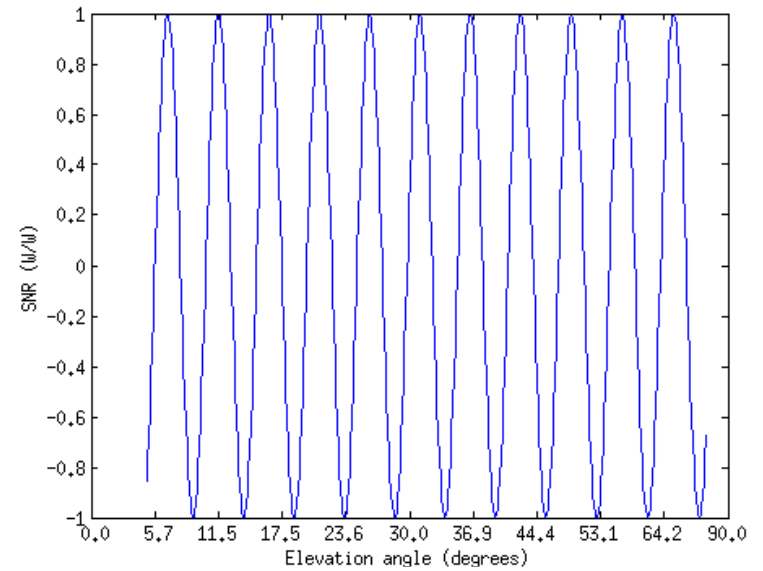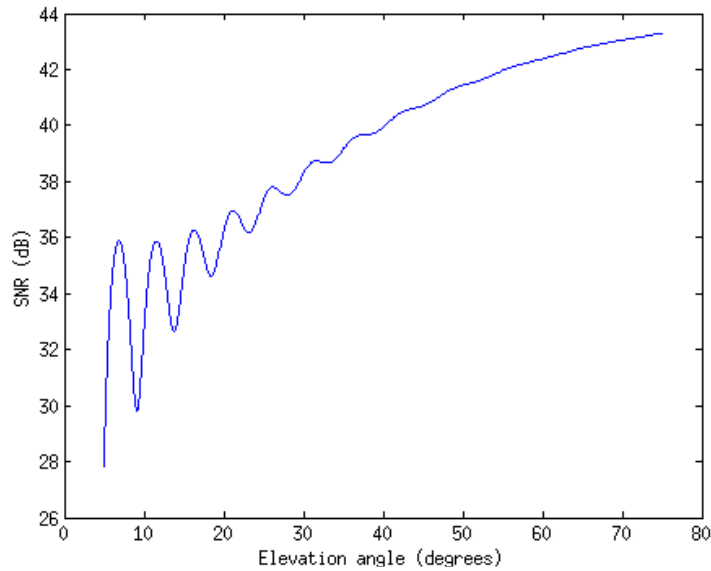


Nyquist frequency


(a) LSP of SNR

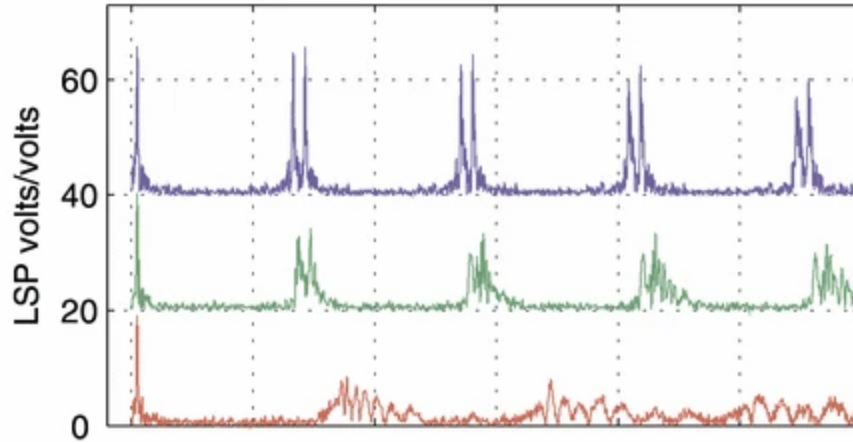


(b) LSP of sampling window

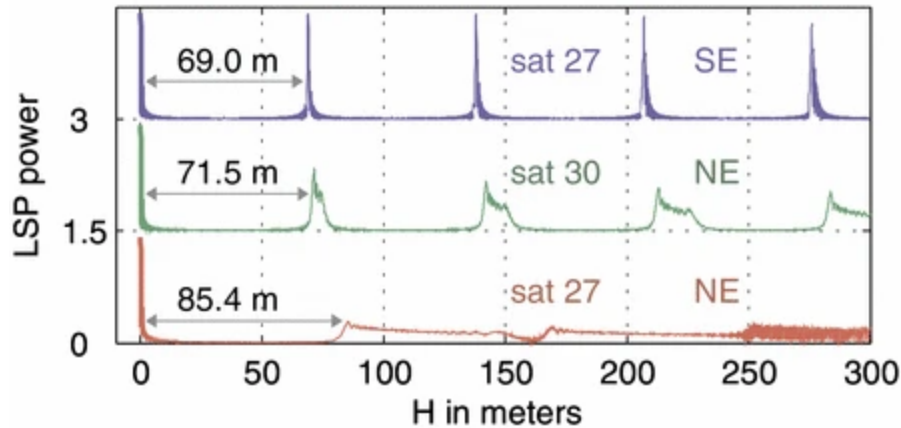


(c) Zoom LSP of SNR

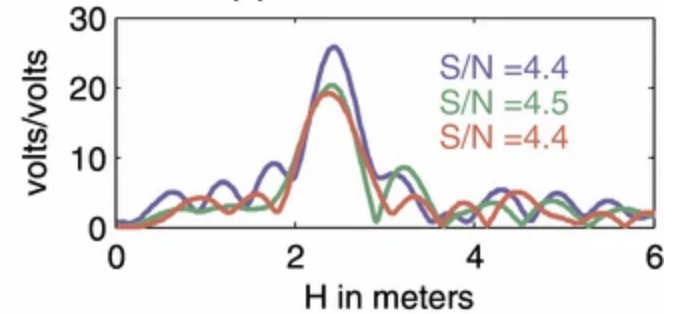

(d) SNR for elevations [5-20] deg

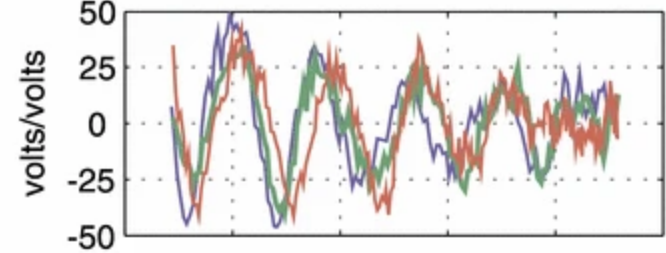

(e) Interval between observations

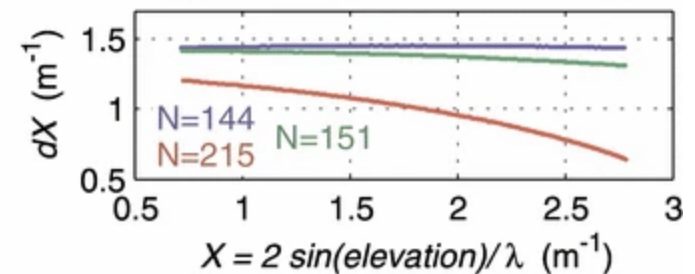

(Roesler & Larson, 2018)

<https://doi.org/10.1007/s10291-018-0744-8>

Empirical—physical model matching

$$\bar{S} \approx P_d(1 + P_i)N_0^{-1}, \quad s \approx 2P_dP_i^{0.5}N_0^{-1} \cos \phi_i$$

$$c_1 \approx E\{S/k_z\}, \quad c_0 \approx E\{S - c_1k_z\}$$

$$A \approx (2\text{Var}\{s - \bar{s}\})^{0.5} \approx E\{2P_dP_i^{0.5}N_0^{-1}\}$$

$$\hat{H} \approx E\{\partial\phi_i/\partial k_z\}, \quad \varphi \approx E\{\phi_i - \hat{H}k_z\}$$

$$\hat{H} \approx H + E\{\partial\phi_x/\partial k_z + \dots\}$$

Altimetry retrieval will be primarily geometric height plus small non-geometric terms

2023 GNSS-IR Short Course – EarthScope Consortium

GNSS Interferometric Reflectometry: Basic Theory

Felipe Geremia-Nievinski (PhD)

Federal University of Rio Grande do Sul

felipe.nievinski@ufrgs.br

<https://orcid.org/0000-0002-3325-1987>

